

GREEN MAGIC HOMES

EARTH SHELTERED HOUSING – GREEN ARCHITECTURE

TECHNICAL DATA SHEET



GREEN MAGIC HOMES - Copyright © 2010 – US Library of Congress – www.GreenMagicHomes.com
Authors Bill of Rights "To promote the progress of science and useful arts, by securing for limited times to authors and inventors the exclusive right to their respective writings and discoveries" (U.S. Constitution, Article I, Section 8)

INDEX

INTRODUCTION	3
CHAPTER 1: THE GREEN MAGIC HOMES SYSTEM AND THE ENVIRONMENT	4
1.1. THE GREEN-MAGIC-HOMES SYSTEM: A SUSTAINABLE ALTERNATIVE	4
1.2. ENERGY EFFICIENCY IN EARTH SHELTERED CONSTRUCTION	5
1.2.1. THE GREEN-MAGIC-HOMES SYSTEM IN TEMPERATE CLIMATES	5
1.2.2. THE GREEN-MAGIC-HOMES SYSTEM IN SUBTROPICAL CLIMATES	9
1.2.3. THE GREEN-MAGIC-HOMES SYSTEM IN TROPICAL CLIMATES	10
1.3. ENVIRONMENTAL QUALITY AND THE GREEN-MAGIC-HOMES SYSTEM	10
1.3.1. LATENT HEAT FLUX AND EVAPOTRANSPIRATION	11
1.3.2. AIR POLLUTANT REMOVAL BY VEGETATION	12
CHAPTER 2: GEOMETRY AND COMPONENTS OF THE <i>GREEN-MAGIC-HOMES</i> SYSTEM	13
2.1. BASIC GEOMETRY.	13
2.2. RELATIONSHIP WITH THE SURROUNDING TERRAIN.	14
CHAPTER 3: PHYSICAL PROPERTIES OF THE <i>GREEN-MAGIC-HOMES</i> SYSTEM	15
3.1. FIRE RESISTANCE	15
3.2. SEISMIC RESISTANCE AND LOAD BEARING PROPERTIES	15
3.3. RESISTANCE TO HUMIDITY	15
CONCLUSIONS - ACKNOWLEDGEMENTS	16

INTRODUCTION

Green-Magic-Homes™ is a building system based on structural modules prefabricated in lightweight composite materials in sizes that allow for easy transportation to and manipulation at the site, and make up a solid, super strong, and waterproof shell. This shell is then covered with soil and vegetation in various forms. The system has different shapes components carefully designed to generate multiple possibilities of design, lighting and ventilation, and access to and connection between spaces. Its basic configuration will allow for multiple widths, with a modulation in increments of 4.26 feet (1.30 meters) to generate spaces of any length that is required in accordance with the needs of each project. The structure consists of a collaboration between the strong, watertight shell working in conjunction with a system of soil berms reinforced with geotextiles, and completed soil and vegetation roof. Both the berms and roof are finally wrapped in a geotextile mesh with an open weave through which grass or other vegetation can grow. This vegetation in the long run will complement and replace the effect of the geotextiles, stabilizing the earth with the action of the roots.



The Green-Magic-Homes™ system requires very simple footings: A running concrete beam, which provides a basis for anchoring the modules, provides enough support in most cases. The system can thus be set on a concrete slab or over a conventional basement system.

CHAPTER 1: THE GREEN-MAGIC-HOMES SYSTEM AND THE ENVIRONMENT

1.1 THE GREEN-MAGIC-HOMES SYSTEM: A SUSTAINABLE ALTERNATIVE

Sustainability has become an increasingly important focus for new construction. The high environmental cost of energy production, the “carbon footprint” of a product or process throughout its life-cycle, the fragility of existing ecosystems, and the impact of human life on the planet and society in general, are urgent issues, which must be addressed, in any new endeavor that we wish to undertake. In most areas of the world, living at a comfortable temperature, with good air and a healthy local ecosystem, are costing society and the planet more and more. Traditional construction systems which once seemed reasonable and good, are being revalued and dissected in order to provide a real picture of their sustainability in our changing world. Everything must be taken into consideration; from the availability and ecological cost extracting the raw materials, the energy required to process and move them to the building site, through the cost of heating or cooling of a particular building, to the ultimate energy cost of maintenance and repairs or replacement of a particular building type. Other factors which are increasingly crucial are a buildings contribution to the local ecology, its interaction with the air and water surrounding it, and the protection it may offer from other undesirable outside effects, including noise, weather disruptions, and social instability.

The use of earth as a building material, in adobe, rammed earth, and earth-sheltered construction is gaining renewed acceptance because of all the aforementioned reasons. In particular the idea of covering a structure with living earth and plants, and using the thermal stability and security provided by the proximity to the ground, is very appealing. However, this type of construction has always been difficult and expensive to achieve, with questionable results. Achieving adequate ventilation and adequate water-proofing in this type of construction has never been easy with traditional methods, and often the result is overbuilt, requiring an extremely strong structure that does not collaborate with the earth surrounding it. The Green-Magic-Homes System has addressed these problems in an entirely new way, using the age old methods of building with earth in conjunction with the space-age technology of composite materials. The inner shell of the buildings is very strong, light, waterproof, and modular, and the earth covering is constructed in such a way that it collaborates structurally with the shell because of its layered construction and the vaulted geometry of the system.

In comparison to other traditional materials such as concrete, brickwork, metals or wood, the total life-cycle assessment of fiberglass composites (FRP) contributes to its viability as a green building product. When consideration is taken for the energy consumed in production and installation, FRP composites generate a much smaller impact than other traditional materials and can be used in ways that are less energy or carbon intensive. The light weight of FRP contributes to overall savings, starting with lower transportation costs. There is no need for heavy lifting equipment and installation is faster which results in less disruption to the environment. The rigidity and structural integrity of FRP as used in the Green-Magic-Homes System means there is less dead weight and less material is required, eliminating unnecessary resource consumption and bringing down costs. By contrast, a similar product made of concrete could require up to 200% more material to produce than FRP and would weigh far more. The process of refining cement, from extraction to fabrication, or firing brick and terracotta in high temperature ovens, generates a large amount of carbon dioxide and other gases. FRP has a life cycle that exceeds other building

materials by remaining resistant to rust, rot and corrosion. By increasing the useful lifespan compared to other products, FRP's durability reduces the need for replacement, repair or repainting. Its durability, low maintenance, and low heat transfer index, mark it as environmentally sustainable on its own. In addition to this, the Green-Magic-Homes System is based on a lamination process that is formulated with certified green resins, containing up to 80% recycled PET (Polyethylene Terephthalate). Coupled with the multiple benefits provided by the organic earth covering, in terms of thermal inertia, well as carbon cycling and oxygen production, and airborne pollutant removal, the Green-Magic-Homes System has the lowest possible carbon footprint through its life-cycle and the highest sustainability of any industrialized system that we know of.

1.2 ENERGY EFFICIENCY IN EARTH SHELTERED CONSTRUCTION

The philosophy of Earth sheltered construction is based on three fundamental principles: energy saving, energy recovery and drawing energy from the environment, by exploiting, among other things, the building's thermal mass. Thermal Mass is different than heat transfer resistance. R-Value is heat transfer resistance only. Typical R-value for earth is 0.25 per inch; however, the thermal character of the soil mass is quite different than that of material designed and used primarily for heat transfer resistance (R-value) like polystyrene or polyurethane foam. When changing from soil to a less massive "insulating" material, you should understand the design performance with regards to heat capacity of the building and/or soil mass (K-value). A massive soil wall or roof can store heat energy to even out the temperature swings of day--lightweight insulation does not perform this way. The thermal value you get from 18 inches of soil far surpasses the 4.5 R-value (0.25 per inch). The use of earth as a large capacity heat storage makes it possible not only to reduce such buildings' demand for heating and cooling energy, but also helps to preserve the local microclimate.

The following presentation is of a series of studies and comparisons of the Green-Magic-Homes System and traditional systems in different climate regions, and are based on our own observations as well as studies and simulations done by others regarding earth sheltered buildings in general.


1.2.1. THE GREEN-MAGIC-HOMES SYSTEM IN TEMPERATE ENVIRONMENTS

The biggest challenge to any building system is posed by the temperate and seasonal environment, (generally above 35 degrees North and 35 degrees South latitude) in which annual temperatures can fluctuate from below freezing in the winter to very hot in summer, and living spaces must be designed for comfort in a constantly changing environment. The Green-Magic-Homes System of earth sheltered construction, coupled with passive solar principles, will provide energy saving solutions in this (as in other) environments. All facts and figures given in this section will apply to other climates, as they include the extremes of hot and cold conditions and their relationship to the built environment.


The concept of passive annual heat storage system (PAHS), a method of collecting heat in the summertime, by cooling the home naturally, storing it in the earth's soil naturally and then afterwards returning that heat to the contact structure (earth home) in the winter was originally introduced by Hait in his book published in 1983. It includes extensive use of natural heat flow methods, and the arrangement of building materials to direct this passive energy from the earth to the building, all without using machinery. According to this concept, there is a cooling action when one climbs down into basement structures or caves. This cooling action experienced in these enclosed environments is a result of the heat being drawn away from the body to the surrounding air, which then transfers this thermal energy into the surrounding structures whose heat content is less than that of the adjacent air mass. The dynamics behind this concept is that heat always flows from a warmer system to a cooler system (as in the case mentioned above with the human body as the warm system and the surrounding air and walls as the cooler system). By this action if you are warmer than the surrounding air, the heat of the body will escape

to the surrounding air until temperature equilibrium is attained. Likewise, in the case the air inside the room is warmer than the surrounding walls, heat will be drawn out of the air into the walls, thus cooling the air and warming the walls. On the other hand, if the air temperature inside the room is cooler than the surrounding walls, heat will be drawn out of the walls into the air by this warming the air and cooling the walls. Passive annual heat storage (PAHS) uses this thermodynamic principle in conjunction with bare earth to aid control of the micro-climate within the building. In the case of the earth sheltered dwelling, it utilizes the surrounding earth to regulate its temperature throughout the year. Globally, the earth receives electromagnetic radiation from the sun, which is typically defined as short-wave radiation and emits it at longer wavelengths known typically as long-wave radiation. This absorption and re-emission of radiation at the earth's surface level, which forms a part of the heat, transfer in the earth's planetary domain yields the idea for the principle of PAHS. When averaged globally and annually, about 49% of the solar radiation striking the earth and its atmosphere is absorbed at the surface (meaning that the atmosphere absorbs 20% of the incoming radiation and the remaining 31% is reflected back to space

Effects of PAHS and passive cooling on Green-Magic-Homes earth sheltered indoor space in summer- Figure 1

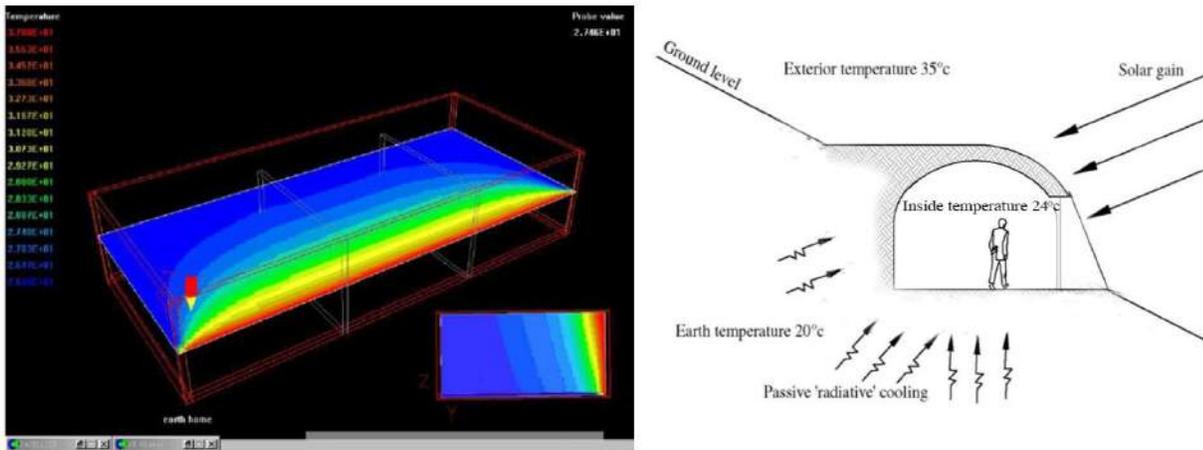

Effects of PAHS and passive warming on Green-Magic-Homes earth sheltered indoor space in winter- Figure 2

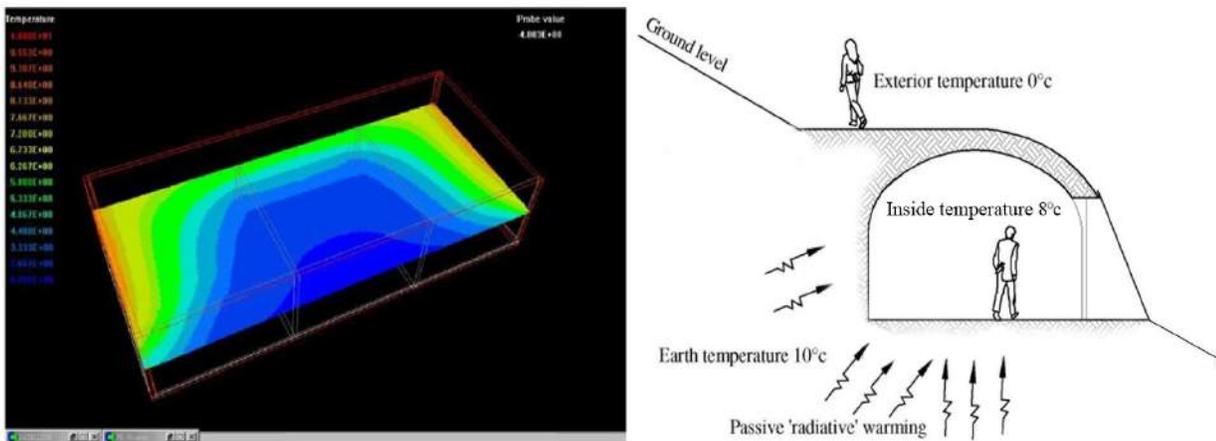

The use of the earth's relatively stable temperature can provide occupant comfort at minimal energy costs. The earth moderates the temperature swings that occur on a daily basis and it has been determined that a time lag of approximately 133 hours occurs at a two-foot depth. The time lag occurs proportionately so that an eight or ten foot depth has a time lag of 2100 to 2200 hours or about 90 days. A reduction of 50 to 75 percent of the normal heating and cooling load requirements can be achieved due to the temperature moderation and time lag of the earth.

Temperature moderation effects on an earth sheltered house with a large thermal mass are shown schematically in Figure 3.

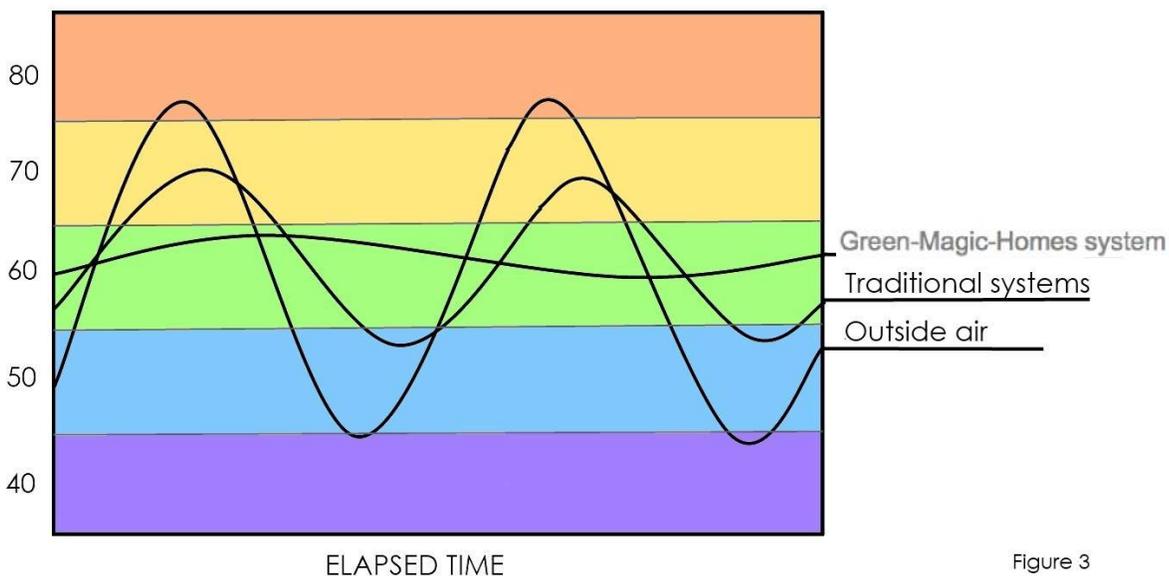



Figure 3

An important question, then, is whether additional insulation is required to optimize the energy performance of the Green-Magic-Homes System in a seasonal environment. In general the more insulation is added, the better the performance in winter time, and the poorer in summer. The figures are as follows:

During heating season heat losses from earth sheltered buildings are about 14%, 8% and 5% smaller for: 1.96 inch, 3.93 inch and 7.87 inch (5 cm, 10 cm and 20 cm) of thermal insulation thicknesses. Increasing soil cover thickness over 19.68 inch (0,5 mt) decreases heat losses about 20 to 25%, 10 to 15% and 5% for 1.96 inch, 3.93 inch and 7.87 inch (5 cm, 10 cm and 20 cm) of thermal insulation. Heat gains during heating season are about 40% higher in earth-sheltered houses than in aboveground houses. In aboveground houses heat gains are 3% of heat losses. In earth-sheltered houses heat gains are up to about 15% of heat losses during heating season. During cooling season heat losses from earth sheltered buildings are about 20 - 35% greater than from above-ground buildings, while heat gains are nearly 80% lower. In the summertime each 1.96 inch (5 cm) of thermal insulation lowers the heat losses by about 20%. In above-ground buildings heat gains during heating season are comparable in the range of analyzed thermal insulation thicknesses. It may be concluded then, that in above-ground buildings the thickness of thermal insulation does not have a significant influence on heat gains. In the earth-sheltered houses heat gains are greater with increasing thermal insulation thickness. Each 1.96 inch (5 cm) of thermal insulation increases heat gains about 40%. In above ground houses heat gains are 35% of heat losses, while in earth-sheltered houses ratio of heat gains to heat losses is smaller. If heat losses are 100% then heat gains are only 5%. This is why earth-sheltered buildings need less cooling energy.


It can be definitely stated that the heating and cooling consumption of earth-sheltered buildings is definitely smaller than that of above-ground ones. The difference between them gets smaller with the increase of the thermal insulation thickness. Earth-sheltered buildings require longer heating periods than conventional above-ground ones, while total heating loads are still smaller. This is due to the lower temperature of the soil surrounding earth sheltered houses. The cooling period is nearly the same. When analyzing the heating energy consumption it can be noticed that the largest difference in heating consumption of an above-ground building and an earth-sheltered one is noticed for 0.5 meters of soil cover. Further increasing of the soil cover thickness doesn't produce such large differences. This relation is also smaller with increasing thermal insulation thickness. The first 19.68 inch (0.5 m) of soil cover reduces heating consumption by about 25 % compared to a conventional above-ground building.

So, the thicker the thermal insulation is, the lower heating energy savings can be obtained. It may be noticed that from the heating energy load's point of view, the thicker soil cover and insulation are, both above-ground and earth-sheltered buildings naturally consume less heating energy. But also with increasing thermal insulation thickness the influence of soil gets smaller, which causes insignificant differences between above-ground and earth sheltered buildings for large insulation thickness. For cooling loads, the soil cover thickness does not have a significant influence. Thus the thinner the thermal insulation is the greater the cooling energy savings are compared to the above-ground ones. This is due to the fact that thermal insulation acts like a coat, and during wintertime protects a building from colder outside soil temperatures but during summer does not allow the soil to naturally cool a building down.

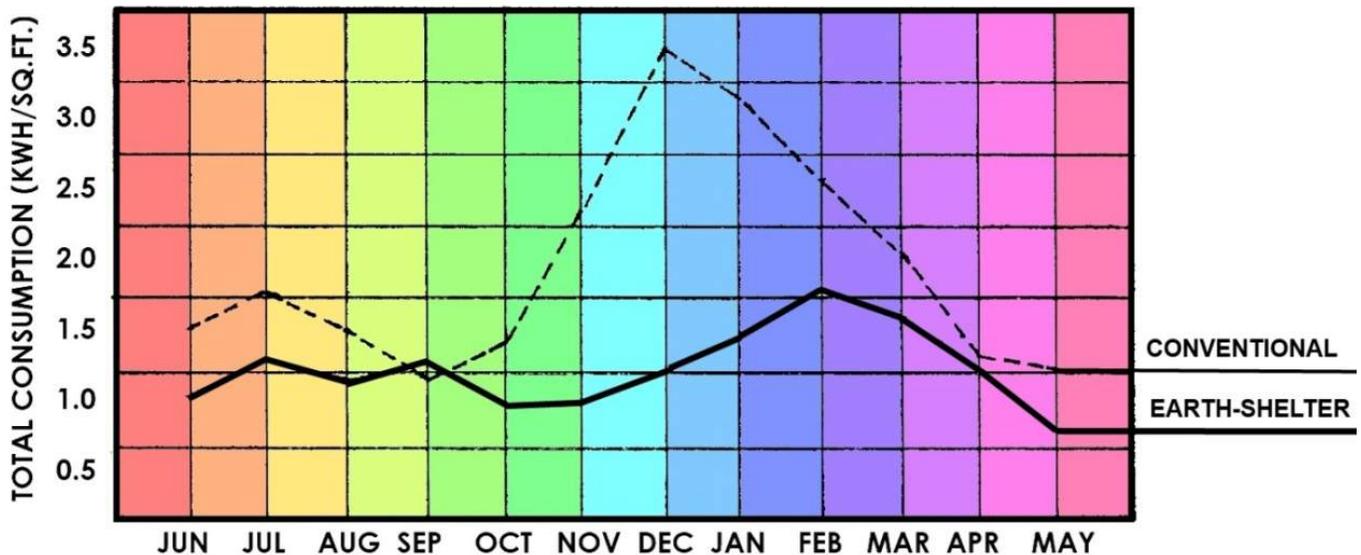

1.2.2. THE GREEN-MAGIC-HOMES SYSTEM IN SUBTROPICAL CLIMATES


The interest in the use of earth to save energy dates back to over 5000 years ago when in some cultures whole towns were built under the ground. The examples are: the town of Matmata in Tunisia, the Goreme Valley in Turkey and the Henan Province in Shanxi (China). All the ancient underground structures are located in hot countries, such as Turkey, Tunisia or northern China, which means that earth was originally used rather for cooling than heating. This is highly significant if one considers the fact that over one third of the continents (about 4.7 million km²) is situated in hot-dry climate (i.e. between 15° and 35° respectively north and south of the equator) and only 12% of the continents are situated in the temperate climates (about 1.55 million km²). Taking into account other climatic conditions, one can say that half of the continents are situated in hot climates. Thus the use of earth as the building's cooling component is of major significance, particularly considering that 15% of the world population inhabits desert and semi-arid areas.

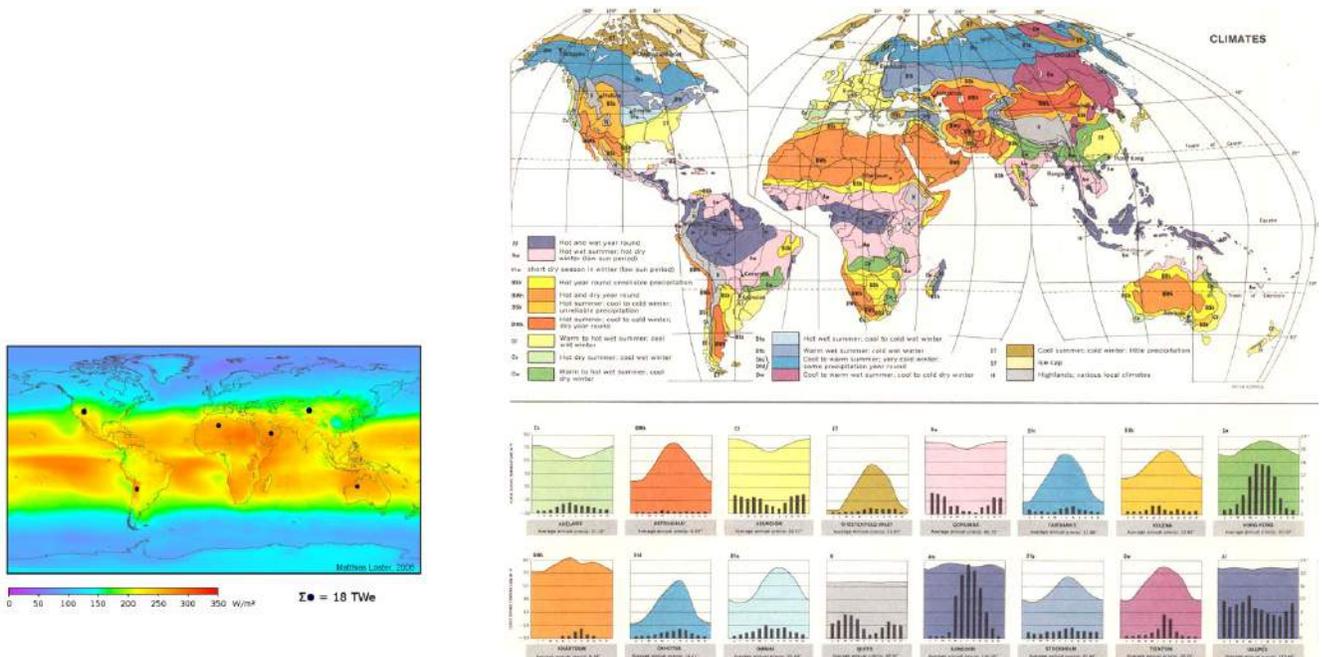

The Green-Magic-Homes System is truly ideal in these conditions. The low humidity, high temperatures in summer with little cloudiness, and moderate temperatures in winter make the Green-Magic-Homes System worthy of serious consideration on a large scale. As was stated in the previous section, heat losses from earth sheltered buildings are about 20 to 35% greater than from above-ground buildings, while heat gains are nearly 80% lower.

1.2.3. THE GREEN-MAGIC-HOMES SYSTEM IN TROPICAL CLIMATES

In tropical regions (roughly from 15 degrees north to 15 degrees south) temperatures are more or less unchanging throughout the year, as the weather conditions are governed mainly by location and altitude. In Humid environments, an important issue that has to be taken into account with the Green-Magic-Homes System (as in any other building system) is the judicious placement of windows and skylights, to ensure adequate ventilation of interior spaces.

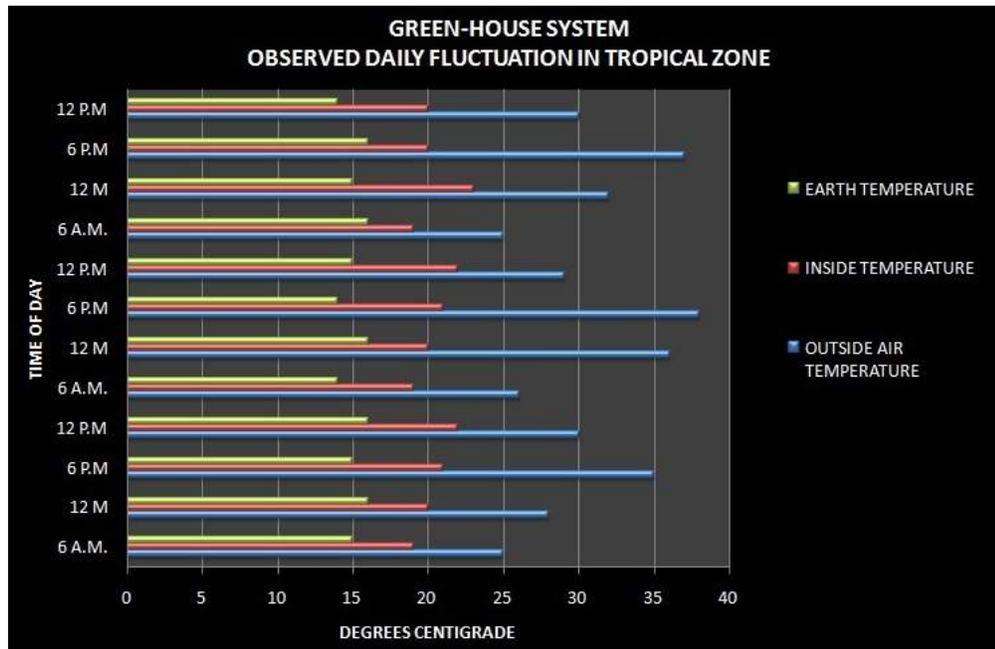

In very hot and humid areas, the most important factor in naturally achieving a comfortable inside temperature is ventilation, as heat is usually carried by the air and does not depend only on the effect of the sun. However, in these areas, the efficiency of even the smallest air conditioning system will outperform any conventional building, as it will be aided by the heat loss caused by the surrounding earth.


1.3. ENVIRONMENTAL QUALITY AND THE GREEN-MAGIC-HOMES SYSTEM

The widespread use of earth sheltered and underground construction could have an enormous effect on the global environment. The effects of deforestation and the impact of urban growth on the world's atmosphere are only now beginning to be understood. In most cities, urban air temperatures are generally higher than their corresponding rural values. This phenomenon, the urban heat island, has been recognized since the turn of this century and has been well documented. Population growth in the 21st century will cause cities to grow and merge with each other, reducing even further the mitigating effects of suburban and rural vegetated areas. One key to the reduction of the negative effects of human communities on global warming, air and water pollution, and the quality of life in general, lies in technologies designed to return the natural environment to the surface level, and human habitation to an intermediate one. These technologies include green roofs and walls, rooftop and vertical urban farming systems, and earth sheltered construction with the Green-Magic-Homes System.

1.3.1. LATENT HEAT FLUX AND EVAPOTRANSPIRATION

Evaporative cooling is the process by which a local area is cooled by the energy used in the evaporation process, energy that would have otherwise heated the area's surface. It is well known that the paving over of urban areas and the clearing of forests can contribute to local warming by decreasing local evaporative cooling, but it was not understood whether this decreased evaporation would also contribute to global warming. The Earth has been getting warmer over at least the past several decades, primarily as a result of the emissions of carbon dioxide from the burning of coal, oil, and gas, as well as the clearing of forests. But because water vapor plays so many roles in the climate system, the global climate effects of changes in evaporation were not well understood. Evapotranspiration (evaporation and transpiration) from soil-vegetation systems is an effective moderator of near-surface climates, particularly in the warm and dry mid and low latitudes. Given the right conditions, evapotranspiration can create 'oases' that are 2-8°C cooler than their surroundings. In extreme oasis conditions, the latent heat flux can be so large that the sensible heat flux becomes negative, meaning that the air above vegetation and over the dry surroundings must supply sensible heat to the vegetated area and the Bowen ratio (ratio of sensible to latent heat fluxes) becomes negative. For example, in deserts, oases can develop with Bowen ratios of 0.26. In more average oasis conditions, Bowen ratios in vegetative canopies are within 0.5-2. In comparison, in urban areas ratios are typically around 5, in a desert it is in the neighborhood of 10, and over tropical oceans, it is about 0.1. Urban areas, with extensive impervious surfaces, have generally more runoff than their rural counterparts. The runoff water drains quickly and, in the long run, less surface water remains available for evapotranspiration, thus affecting the urban surface energy balance. The lower evapotranspiration rate in urban areas is a major factor in increasing daytime temperatures. Simulations indicate that a vegetative cover of 30% could produce a noontime oasis of up to 6°C in favorable conditions, and a nighttime heat island of 2°C. In conclusion, increases in vegetation in urban areas can result in some 2°C decrease in air temperatures. Under some circumstances, e.g., potentially evaporating soil-vegetation systems and favorable meteorological conditions, the localized decrease in air temperature can reach 4°C.

evapotranspiration =
transpiration + evaporation

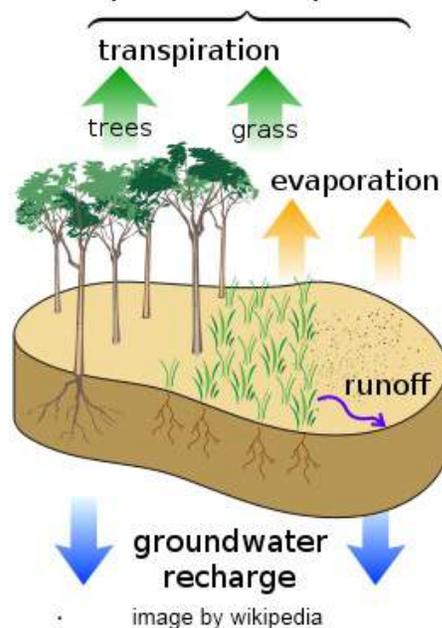

The long-range benefits of evapotranspiration have often been confused with the question of the Albedo effect, which is a relative measurement of the reflectivity of surfaces and of the planet itself. In general, the more reflective surfaces are (the higher the Albedo), the less radiation they absorb and the less heat they reflect back into the atmosphere. Since forests are generally attributed a low albedo, (as the majority of the ultraviolet and visible spectrum is absorbed through photosynthesis), it has been erroneously assumed that removing forests would lead to cooling on the grounds of increased albedo. Through the evapotranspiration of water, trees discharge excess heat from the forest canopy. This water vapor rises resulting in cloud cover, which also has a high albedo, thereby further increasing the net global cooling effect attributable to forests

1.3.2. AIR POLLUTANT REMOVAL BY VEGETATION

Vegetation in urban and suburban areas reduces air pollutants through a dry deposition process and microclimate effects. The high surface area and roughness provided by the branches, twigs, and foliage make vegetation an effective sink for air pollutants. Vegetation also has an indirect effect on pollution reduction by modifying microclimates. Plants lower the indoor air temperature through shading, thus reducing the use of electricity for air conditioning. The final result is that the emission of pollutants from power plants decreases due to reduced energy use. Vegetation also lowers the ambient air temperature by changing the albedos of urban surfaces and evapotranspiration cooling. The lowered ambient temperature then slows down photochemical reactions and leads to reduced secondary air pollutants, such as ozone.


Studies show that (in urban areas) the annual removal per hectare of green roof and grass areas is 85 kilograms and the annual removal per hectare of forest cover is 97 kilograms. In rural areas the rates would be smaller due to lower concentrations.

Observed deposition velocities of SO₂, NO₂, PM₁₀, and O₃ over different vegetation types reported in the literature

Pollutants	Vegetation (<i>h</i> ₀ in m)	<i>V</i> _d Value (cm s ⁻¹)	References
SO ₂	Short grass (0.1)	0.2 ± 0.1–0.4 ± 0.2	Sorimachi et al. (2003)
	Grass (0.3)	0.6–0.8	Feliciano et al. (2001)
	Heathland	0.8 ± 0.4	Erismann et al. (1993)
	Grassland	1.2 ± 0.3	Erismann et al. (1993)
	Grassland (0.1–0.8)	0.4–0.7	Pio and Feliciano (1996)
	Deciduous forest	0.48 ± 0.45	Zhang et al. (2002)
	Deciduous forest (22)	0.30–1.04	Finkelstein (2001)
NO ₂	Heathland	0.10–0.35	Coe and Gallagher (1992)
	Grass (0.15)	0.27 ± 0.017	Watt et al. (2004)
	Wheat	0–0.35	Pilegaard et al. (1998)
	Grassland	0.11–0.24	Hesterberg et al. (1996)
	Orchard (2.1)	0.2–0.6	Walton et al. (1997)
	Coniferous forest	0.4	Rondón et al. (1993)
O ₃	Short grass (0.1)	0.2 ± 0.2–0.4 ± 0.3	Sorimachi et al. (2003)
	Grassland (0.22)	0.22–0.36	Stocker et al. (1993)
	Grass (0.1–0.8)	0.1–0.5	Pio et al. (2000)
	Mooreland	0.2–0.7	Fowler et al. (2001)
	Deciduous trees (33)	0.2–1.0	Padro (1996)
	Deciduous forest (22)	0.10–0.75	Finkelstein (2001)
PM ₁₀	Grass (0.06)	0.16–0.12 (<i>d</i> _p = 5)	Chamberlain (1967)
	Nature grass (0.3–0.5)	0.22 ± 0.06	Wesely et al. (1985)
	Rye grass (0.75–1)	0.16 ± 0.072 (NGMD = 0.52)	Vong et al. (2004)
	Urban grass (0.1–0.25)	0.33–0.38 (<i>d</i> _p = 0.6–0.8)	Fowler et al. (2004)
	Urban woods (25)	0.7–1.07 (<i>d</i> _p = 0.6–0.8)	
	Deciduous trees (22)	0.1 (<i>d</i> _p < 2)	Hicks et al. (1989)
	Beach (24–25)	0.45 (NGMD ^a = 0.02–0.03)	Pryor (2006)
		0.15 (NGMD ^a = 0.06–0.07)	

Most of these studies are related to the replacement of existing roofs with green roofs, and assume a cost to benefit ratio considering other methods of pollution removal. However, if one relates these figures to the possibility of earth-sheltered communities existing with plant cover as the natural medium, where a large proportion of all construction would be relatively invisible, the implications for human health and the health of the planet itself are considerable.

CHAPTER 2: GEOMETRY OF THE GREEN-MAGIC-HOMES SYSTEM

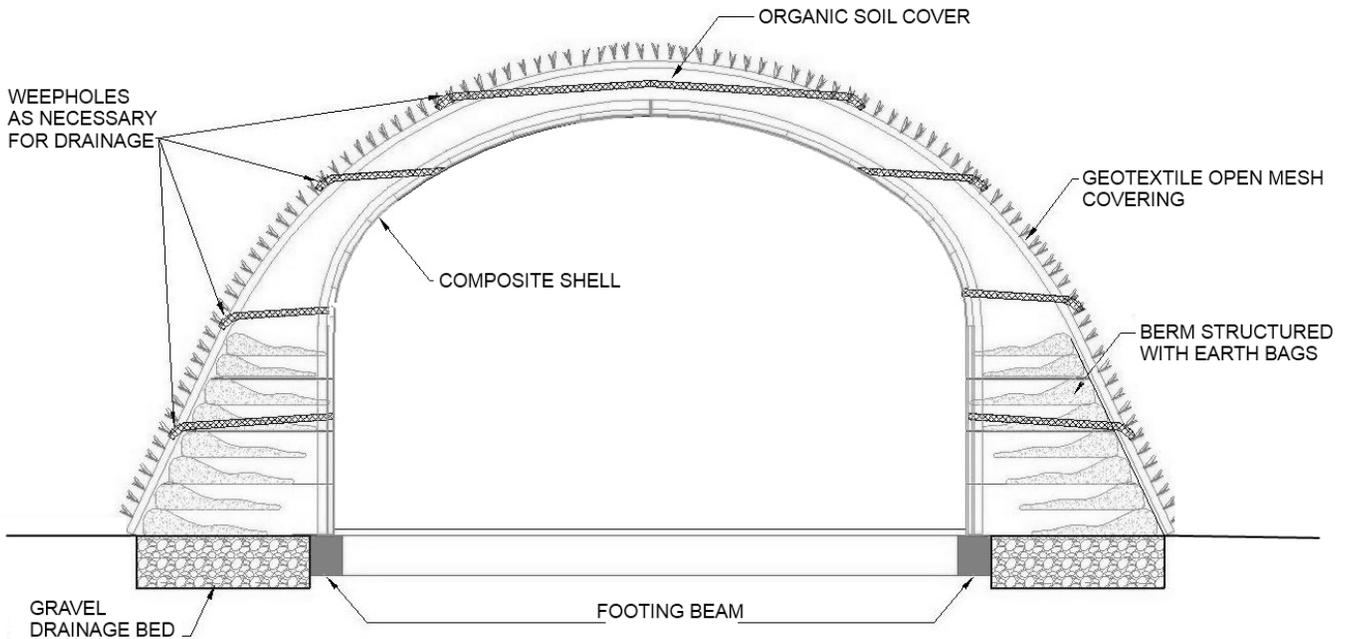


The Green-Magic-Homes System derives a wide variety of possibilities of design from a few basic geometric conditions, as it is based on a vaulted arch having uniform characteristics: straight vertical walls up to 3.93 ft (1.20 meters) high, crowned by a two-point arch that has a total height of 11.48 ft (3.50 meters) at its highest point and a total width of 19.22 ft (5.86 meters) maximum width.




2.2. RELATIONSHIP WITH THE SURROUNDING TERRAIN

The Green-Magic-Homes System is well suited to different types of terrain.


It can be used over flat ground:

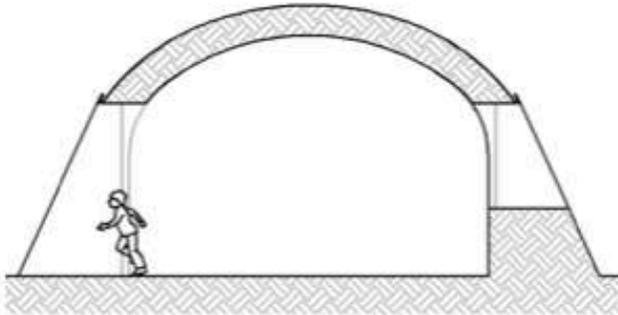

Or set into moderate slopes:

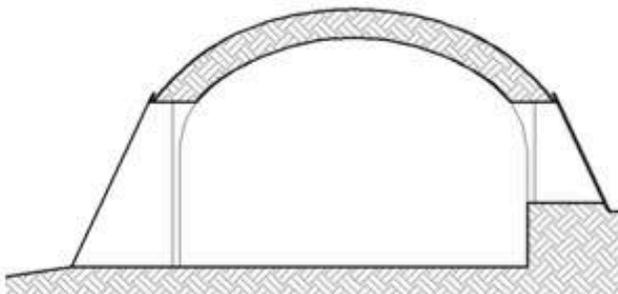

Or in terrains with stronger slopes:

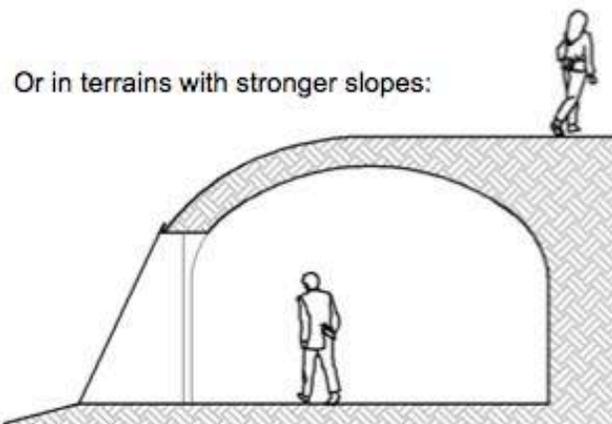

CHAPTER 3: PHYSICAL PROPERTIES OF THE GREEN-MAGIC-HOMES SYSTEM

3.1. FIRE RESISTANCE

The modules of the Green-Magic-Homes System adhere to the International Building Code (IBC) since 1996 with regard to fire resistance:

SECTION 2612

FIBER REINFORCED POLYMER AND FIBERGLASS REINFORCED POLYMER

2612.6 Exterior use. Fiber reinforced polymer or fiberglass reinforced polymer shall be permitted to be installed on the exterior walls of buildings of any type of construction when such polymers meet the requirements of Section 2603.5 and is fire-blocked in accordance with Section 717. The fiber reinforced polymer or the fiberglass reinforced polymer shall be designed for uniform live loads as required in Table 1607.1 as well as for snow loads, wind loads and earthquake loads as specified in Sections 1608, 1609 and 1613, respectively.

2603.5.7 Ignition. Exterior walls shall not exhibit sustained flaming where tested in accordance with NFPA 268. Where a material is intended to be installed in more than one thickness, tests of the minimum and maximum thickness intended for use shall be performed.

Exception: Assemblies protected on the outside with one of the following:

- 1. A thermal barrier complying with Section 2603.4.*
- 2. A minimum 1 inch (25 mm) thickness of concrete or masonry.*
- 3. Glass-fiber-reinforced concrete panels of a minimum thickness of 3/8 inch (9.5 mm).*
- 4. Metal-faced panels having minimum 0.019inch thick (0.48 mm) aluminum or 0.016-inchthick (0.41 mm) corrosion-resistant steel outer facings.*
- 5. A minimum 7/8 inch (22.2 mm) thickness of stucco complying with Section 2510.*

In other words: the structural system of composite material Green-Magic-Homes System is effectively fire-blocked as installed against a fire-proof substrate.

3.2. SEISMIC RESISTANCE AND LOAD-BEARING CAPACITY.

Green-Magic-Homes Technology buildings are ideal for areas of high seismic risk since they are basically one-story constructions, intimately linked to the land, and laterally confined by the terrain itself and berms, which provide optimal lateral stability. They are designed to support the top layer of soil (7.87 inch = 20 centimeters) plus 200 kg/m² live load, which allows for the installation of lightweight structures (such as wooden pergolas), all this supported by structural studies (as well as actual tests) that ensure structural stability. For the necessary documentation for obtaining building permits and approvals, we provide the reports of structural calculations and all other necessary support.

3.3. RESISTANCE TO HUMIDITY

The Green-Magic-Homes System panels are made from fully waterproof composite materials. However, over time, usually after ten to fifteen years, this material can be prone to hydrolysis or deterioration caused by moisture. This is due to fibers reinforcing the material; sometimes they will come up to the surface of the elements and form micro-conducts through which moisture can penetrate in tiny quantities. This moisture cannot pass inward in any case, and because of this is deposited on the inside of the composite material. To prevent this problem, it is only necessary to cover the structures fully (before applying the soil

covering) with asphalt emulsion or other bituminous type coatings. This ensures the long life of the material through time without any further maintenance.

CONCLUSIONS AND ACKNOWLEDGEMENTS

There is a growing body of evidence that the visual and physical contact with the natural world provides a range of benefits to people. These include both mental benefits such as the reduction of stress, and physical benefits including the provision of cleaner air. Access to green space can bring about direct reductions in a person's heart rate and blood-pressure, and can aid general well-being. A Texan study of post-surgery recovery in hospitals demonstrated that recovery was quicker and with less chance of relapse if patients could look out onto green space. A number of American hospitals have subsequently been redesigned to bring these benefits to patients. The negative effects of 21st century life can be reduced in many ways by earth sheltered, green construction. Sound insulation of a 7.87 inch = 20 cm thick earth wall or roof with vegetation is in the neighborhood of 63 decibels, virtually sound-proofing interior spaces. The increased production of oxygen, reduction of many types of pollution, added to the reduction of energy waste, are irrefutable arguments for the cause of earth sheltered construction.

We can envision a world where human presence is once again unobtrusive, and the negative footprint of man on the surface of the planet is reduced. The many arguments for the sustainability of earth sheltered housing cannot be denied, and the Green-Magic-Homes System will solve many of the impediments to achieving this goal.

Acknowledgements and References

Chapter 1 contains observations and measurements performed by Green-Magic-Homes Corp., but is primarily a compendium and summary of the works of respected scientists and professionals in the fields of Biology, Earth Sciences, Architecture and others. The sources we have used are listed here, not necessarily in the order in which they are referred to.

Rekki L. Helms, *PASSIVE SOLAR CONTRIBUTION TO EARTH SHELTER PERFORMANCE*, Thesis, 1979.

Al-Temeemi A.A., Harris D.J.: *A guideline for assessing the suitability of earth-sheltered mass-housing in hot-arid climates*, Energy and Buildings, Vol. 36, 2004.

Ickiewicz I.: *Heat conduction in building soils* (in Polish), PhD Thesis, Białystok Polytechnic, Białystok, 1988.

Jacovides C.P., Mihalakakou G., Santamouris M., Lewis J.O.: *On the ground temperature profile for passive cooling applications in buildings*, Solar Energy, Vol. 3, 1996,

Janssen H.: *The influence of soil moisture transfer on building heat loss via the ground*, Ph.D. Thesis, Katholieke Universiteit Leuven, Belgium, 2002.

Jędrzejuk H., Marks W.: *Optimization of shape and functional structure of buildings as well as heat source utilization. Partial problems solution*, Building and Environment, Vol. 37, 2002,

Nowak H.: *External interaction of environmental thermal radiation on the building* (in Polish), Scientific Papers of the Institute of Building Engineering at Wrocław University of Technology, WUT Publishing House, Wrocław, 1999.

Nowak H.: *Modeling of the longwave radiation incident upon a building*, Archives of Civil Engineering, XLVII, Vol. 2, 2001. PN-EN-ISO:13370, *Thermal performance of buildings – Heat transfer via ground – calculation methods* (in Polish).

Sodha M.S.: *Short communication: Simulation of dynamic heat transfer between ground and underground structures*, International Journal of Energy Research, Vol. 25, 2001

Staniec M., Nowak H.: *Buildings partly or completely sunk in ground, as alternative to conventional aboveground buildings* (in Polish), Xth Polish Scientific-Technical Conference on Physics of Buildings in Theory and Practice, Łódź, 2005.

Staniec M., Włodarczyk D., Nowak Ł.: *Examples of earth-sheltered buildings in Great Britain* (in Polish), Renewable Energy. *Innovative ideas and technologies for construction*, scientific Papers of Rzeszów Polytechnic, Rzeszów Polytechnic Publishing House, Solina, 2006, pp. 465–476.

Staniszewski B.: *Heat exchange. Theoretical basis* (in Polish), 2nd Edition, Państwowe Wydawnictwo Naukowe, Warsaw, 1980.

Thompson R.D.: *Man's Impact on Climate with particular reference to energy balance changes at the earth's surface*, Recourses and Planning, Pergamon Press, 1979.

Xianting L., Zhen Y., Bin Z., Ying L.: *Numerical analysis of outdoor thermal environment around buildings*, Building and Environment, Vol. 40, 2005

Staniec M.: *Analysis of the influence of earth-sheltering on the building's energy balance*

(in Polish), PhD Thesis, Series PRE No. 01/09, Wrocław University of Technology, 2009

Jun Yang a,c,* , Qian Yu b, Peng Gong c *Quantifying air pollution removal by green roofs in Chicago*.

Shapira, H. B., *Cost and Energy Comparison Study of Above- and Below-Ground Lkuellings*, Oak Ridge National Laboratory report, ORNL/CON-91

Feisel, L. D., *EcorLornic and Design Considerations f i an Underground House*, South Dakota School of Mines and Technology, December 1979

Goldberg, L. F. and C . A. Lane, *A Preliminary Experimental Energy Performance Assessment of Five Houses in the MHFA Earth sheltered Housing Demonstration Pro-Turn*, University of Minnesota, Minneapolis, 1981

Eoyer, L. L. and W. T. Grondzik, *Habitability and Energy Performance of Earth- Sheltered Dwelliwgs*, Oklahoma State University, Stillwater, December 1980

Lewis, D. and W. Fuller, *Solar Age*, (December 1979).

Shureliff, W. A., *Superinsdated Houses and Double-Envelope Houses, A Preliminary Surveg of Principles and Practice*, 2nd Ed., available from author, 19 Appleton Street, Cambridge, Mass., April 1980,

Lahs, K., *Regional Analysis of Ground and Aboveground Climate*, Undercurrent Design Research, New Haven, Conn., 1981.